

BASE PRICES Price includes roof only with 8' eave height

32x20	34x20	36x20	38x20	40x20
\$6,095	\$6,295	\$6,495	\$6,695	\$6,895
32x25	34x25	36x25	38x25	40x25
\$7,295	\$7,545	\$7,795	\$8,045	\$8,295
32x30	34x30	36x30	38x30	40x30
\$8,595	\$8,895	\$9,195	\$9,495	\$9,795
32x35	34x35	36x35	38x35	40x35
\$9,995	\$10,345	\$10,695	\$11,045	\$11,395
32x40	34x40	36x40	38x40	40x40
\$11,195	\$11,570	\$11,945	\$12,320	\$12,695
32x45	34x45	36x45	38x45	40x45
\$12,495	\$12,920	\$13,345	\$13,770	\$14,195
32x50	34x50	36x50	38x50	40x50
\$13,695	\$14,195	\$14,695	\$15,195	\$15,695



**Lull Lift Required
for Installation**

See Lift Guide for Details

Price not included, additional fee will be incurred.

Legs are 12" wide, thus reducing the inside of the clear span by 24".

WE ONLY USE HIGH QUALITY GALVANIZED STEEL!



29 GAUGE SHEET METAL SPECS:

ASTM A653 Grade 80
G40 Galvanized Coating or AZ40
20-Year Beckers Paint System

TUBE FRAME SPECS:

ASTM A653 HSLA Grade 50
G60 Galvanized Coating
14 Gauge Steel / Optional 12 Gauge



STANDARD FEATURES Pre-engineered 35PSF-140MPH

(3 second gust ultimate wind speed (Vult) 140mph / Nominal wind speed 112mph)

Commercial grade features include 14 gauge galvanized steel truss system with industry leading tubular knee bracing, 29 gauge metal roofing with 20 year Beckers paint system, framing spaced 5' on center, and concrete anchors are included in base price. Eagle Carports, Inc. is not responsible for stopping, or repairing leaks under base rails. Base leg height is 8' tall. Please note: Eagle Carports, Inc. does not provide any site work. Truss design may vary slightly (from picture above). Customers are required to contact local building/zoning departments about codes for permitting purposes before order finalization. *Alabama orders requiring higher loads will incur additional site-specific drawings. Please call for more details.

PRICING SHOWN IS FOR RISK CATEGORY I/WIND EXPOSURE B. PLEASE CALL THE CORPORATE OFFICE FOR RISK CATEGORY II/WIND EXPOSURE C OPTIONS.

REF. NUMBER : 25-509



- ✓ **FREE EAGLE EMBLEM!**
- ✓ **FINANCING & RTO AVAILABLE!**
- ✓ **90 DAY WORKMANSHIP WARRANTY!**
- ✓ **INSTALLATION INCLUDED!** (Restrictions apply)

- Lot must be cleared & leveled prior to installation.
- All cement pads must have turn down footers.
- Price doesn't include site preparation.



OPTIONAL FEATURES FOR 32' - 40' CLEARSPAN - REF. # 25-509

Prices effective 07.24.2025

OPTIONAL 12G FRAME UPGRADE	20' L	25' L	30' L	35' L	40' L	45' L	50' L
32' - 40' WIDE	\$2,220	\$2,540	\$2,860	\$3,180	\$3,500	\$3,820	\$4,140
FLUSH MOUNT CONCRETE KIT	\$200	\$220	\$240	\$260	\$280	\$300	\$320

26G PANEL UPGRADE	CHARGE 15% INCREASE IN THE FOLLOWING: BASE UNIT, SIDES, ENDS, PANELS, AND GABLES. ONLY IN: BARN RED, BLACK, PEBBLE BEIGE, EARTH BROWN, EVERGREEN, PEWTER GRAY, QUAKER GRAY, FROSTED BLACK, & WHITE.						
-------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--	--	--

Flush mount kits allow cement pads to be the exact width and length of the building without requiring a 2" perimeter.

HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
9'	\$300	\$350	\$400	\$450	\$500	\$550	\$600
10'	\$450	\$525	\$600	\$675	\$750	\$825	\$900
11'	\$600	\$700	\$800	\$900	\$1,000	\$1,100	\$1,200
12'	\$750	\$875	\$1,000	\$1,125	\$1,250	\$1,375	\$1,500
13'	\$900	\$1,050	\$1,200	\$1,350	\$1,500	\$1,650	\$1,800
14'	\$1,050	\$1,225	\$1,400	\$1,575	\$1,750	\$1,925	\$2,100
15'	\$1,200	\$1,400	\$1,600	\$1,800	\$2,000	\$2,200	\$2,400
16'	\$1,350	\$1,575	\$1,800	\$2,025	\$2,250	\$2,475	\$2,700

HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
8'	\$1,070	\$1,300	\$1,530	\$1,760	\$1,990	\$2,220	\$2,450
9'	\$1,270	\$1,555	\$1,840	\$2,120	\$2,405	\$2,685	\$2,970
10'	\$1,335	\$1,630	\$1,925	\$2,220	\$2,515	\$2,810	\$3,105
11'	\$1,435	\$1,755	\$2,075	\$2,395	\$2,715	\$3,035	\$3,355
12'	\$1,495	\$1,830	\$2,165	\$2,495	\$2,830	\$3,160	\$3,495
13'	\$1,700	\$2,085	\$2,470	\$2,855	\$3,240	\$3,625	\$4,010
14'	\$1,880	\$2,290	\$2,700	\$3,110	\$3,520	\$3,930	\$4,340
15'	\$1,950	\$2,360	\$2,770	\$3,180	\$3,590	\$4,000	\$4,410
16'	\$2,000	\$2,410	\$2,820	\$3,230	\$3,640	\$4,050	\$4,460
V. WAINSCOTING	\$325	\$400	\$475	\$550	\$625	\$700	\$775

HEIGHT	32' W	34' W	36' W	38' W	40' W
8'	\$1,995	\$2,120	\$2,245	\$2,370	\$2,495
9'	\$2,095	\$2,245	\$2,345	\$2,545	\$2,695
10'	\$2,195	\$2,345	\$2,495	\$2,645	\$2,795
11'	\$2,395	\$2,520	\$2,645	\$2,770	\$2,895
12'	\$2,495	\$2,670	\$2,845	\$3,020	\$3,195
13'	\$2,595	\$2,770	\$2,945	\$3,120	\$3,295
14'	\$2,695	\$2,870	\$3,045	\$3,220	\$3,395
15'	\$2,795	\$2,970	\$3,145	\$3,320	\$3,495
16'	\$2,895	\$3,070	\$3,245	\$3,420	\$3,595
V. WAINSCOTING Per End	\$560	\$595	\$630	\$665	\$700

SIZE	PRICE
20' L	\$340
25' L	\$405
30' L	\$480
35' L	\$555
40' L	\$640
45' L	\$695
50' L	\$760


WANT AN EASIER WAY TO BUILD & PRICE YOUR METAL STRUCTURE?
Visit: build.eaglecarports.com

CONCRETE DIMENSIONS	All stated dimensions are in reference to the frame size, not the roof dimensions.	
With Flush Mount Kit	Without Flush Mount Kit	
Cement pads do not require additional width.	All cement pads require 2" wider on all sides.	
Ex. 20' x 30' unit will need a 20' x 30' pad.	Ex. 20' x 30' unit will need a 20'4" x 30'4" pad.	



WALK-IN DOORS - 36"x80"	
MHD:Right H. Outswing RD: Right H. Inswing	
MOBILE HOME DOOR	\$395
BLACK 6-PANEL M.H. DOOR	\$420
9 LIGHT DOOR	\$575

WINDOWS with Grid		
24"x36" - White	30"x36" - White	30"x36" - Black
\$195 Non-Rated	\$215 Non-Rated	\$275 Non-Rated
\$220 Wind-Rated	\$240 Wind-Rated	N/A

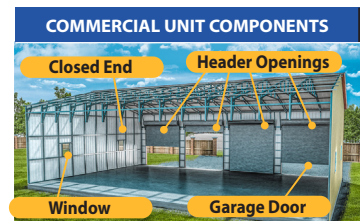

45° TRIM KIT	
Garage Door or Frame Out Add-on	
PER OPENING	\$100

Must close end or side

TRIMMED GABLE END	
32' - 40' Wide	\$825 EA.
FRAME OUTS - Use for framing of customer provided windows & doors	
WINDOW	WALK-IN DOOR
\$70	\$85

LEAN TO CONNECTION FEES On End	
32' - 40'	\$500

EXTRA RAFTERS/ TRUSSES	
32' - 40' W	ADDITIONAL HEIGHT
\$1,095	8' standard incl. \$30 per foot up to 14' tall.

SIDE CONNECTION FEES Per Side						
20' L	25' L	30' L	35' L	40' L	45' L	50' L
\$120	\$140	\$160	\$180	\$200	\$220	\$240

INSULATION			<div>DRIPSTOP</div> <div>Prevents water damage caused from condensation.</div> <div>\$1.00 SF</div> <div><i>Dripstop is only available in our North Carolina coverage area.</i></div>
DOUBLE BUBBLE TYPE (MOISTURE BARRIER)	R5	\$1.50 SF	
2" FIBERGLASS	R7	\$2.25 SF	
ROOF (Vertical Only): Add 2" to width and multiply by length. Ex. 24' wide x 26' long 26 x 26 = 676 SF x \$/per SF			
SIDES: Multiply leg height by length by 2. Ex. 26' long x 10' tall 10 x 26 = 260 x 2 = 520 sf x \$/per SF			
ENDS: Add 1.5 to leg height, multiply by building width. Ex. 24' wide x 10' tall 11.5 x 24 = 276 x 2 = 552 sf x \$/per SF			

ADDITIONAL LABOR FEES	20' L	25' L	30' L	35' L	40' L	45' L	50' L
BUILD OVER FEE	\$150	\$175	\$200	\$250	\$275	\$325	\$350
CUT LEGS ON SITE*	\$100	\$125	\$150	\$175	\$200	\$225	\$250

*Cut leg fee has a maximum of 12" adjustment possible, either front to back or side to side.
Please note, side to side on level lots will result in gap underneath garage doors.