Eagle Carports™

Standard Carports 12′ - 24′

HIGH WIND APPLICATIONS: AL, GA, LA, MS, NC, SC, TX

PRICES EFFECTIVE APRIL 1ST 2021

VERTICAL ROOF

Includes 6″ overhang on all sides

12x20	18x20	20x20	22x20	24x20
$2,295	$2,695	$2,895	$3,095	$3,295
12x25	**18x25**	**20x25**	**22x25**	**24x25**
$2,795	$3,295	$3,495	$3,695	$3,895
12x30	**18x30**	**20x30**	**22x30**	**24x30**
$3,295	$3,895	$4,095	$4,295	$4,595
12x35	**18x35**	**20x35**	**22x35**	**24x35**
$3,595	$4,295	$4,595	$4,895	$5,695
12x40	**18x40**	**20x40**	**22x40**	**24x40**
$4,095	$4,895	$5,395	$5,895	$6,395
12x45	**18x45**	**20x45**	**22x45**	**24x45**
$4,595	$5,795	$6,295	$6,795	$7,295
12x50	**18x50**	**20x50**	**22x50**	**24x50**
$4,895	$6,295	$6,795	$7,295	$7,795

BOXED EAVE ROOF

also known as A-FRAME

Includes 6″ overhang on all sides

12x20	18x20	20x20	22x20	24x20
$1,695	$2,095	$2,295	$2,495	$2,695
12x25	**18x25**	**20x25**	**22x25**	**24x25**
$2,045	$2,545	$2,745	$2,945	$3,145
12x30	**18x30**	**20x30**	**22x30**	**24x30**
$2,495	$2,995	$3,195	$3,395	$3,595
12x35	**18x35**	**20x35**	**22x35**	**24x35**
$2,945	$3,445	$3,645	$3,845	$4,045

REGULAR ROOF

Includes 6″ overhang on front & back

12x20	18x20	20x20	22x20	24x20
$1,595	$1,995	$2,195	$2,395	$2,595
12x25	**18x25**	**20x25**	**22x25**	**24x25**
$1,895	$2,395	$2,595	$2,795	$2,995
12x30	**18x30**	**20x30**	**22x30**	**24x30**
$2,295	$2,795	$2,995	$3,195	$3,395
12x35	**18x35**	**20x35**	**22x35**	**24x35**
$2,695	$3,195	$3,445	$3,695	$3,945

Pricing shown is for Risk Category I/Wind Exposure B. Please call for Risk Category II/Wind Exposure C options.

STANDARD FEATURES *Rated for 140MPH (3 second gusts, not sustained)*

Standard carport features include the following: 14 gauge galvanized steel framing, 29 gauge metal roofing with 20 year Beckers paint system, framing spaced 5′ on center. Includes both peak and leg braces for additional strength and stability. Concrete Anchors or Rebar Anchors, and Earth Auger Anchors are included in base price. Eagle Carports, Inc. is not responsible for stopping, or repairing leaks under base rails. ***Base leg height is 6′ tall.***

Please note: Eagle Carports, Inc. does not provide site work.

Beckers™ 20 YEAR Paint Warranty
On roofing materials.
**Not available for regular style and boxed eve style longer than 31 feet.*

FREE EAGLE W/PURCHASE OF GABLE END OR CLOSED END

FREE INSTALLATION ON YOUR LEVEL LOT

90 DAY WORKMANSHIP WARRANTY

FINANCING & RTO AVAILABLE

© 2021 Copyright All Rights Reserved Eagle Carports , Inc. All prices are subject to change without notice 4.21

We accept all major credit cards.

OPTIONAL FEATURES FOR 12' - 24' WIDE STANDARD CARPORTS

EAVE HEIGHT

HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
7'	$80	$100	$120	$140	$160	$180	$200
8'	$160	$200	$240	$280	$320	$360	$400
9'	$240	$300	$360	$420	$480	$540	$600
10'	$320	$400	$480	$560	$640	$720	$800
11'	$400	$500	$600	$700	$800	$900	$1,000
*12'	$900	$1,100	$1,300	$1,500	$1,700	$1,900	$2,100
*13'	$1,000	$1,200	$1,400	$1,600	$1,800	$2,000	$2,200
**14' DBL	$1,300	$1,500	$1,800	$2,100	$2,400	$2,700	$3,000
**15' DBL	$1,425	$1,650	$1,975	$2,300	$2,625	$2,950	$3,275
**16' DBL	$1,550	$1,800	$2,150	$2,500	$2,850	$3,200	$3,550

** Leg with insert* *** Requres lift for installation* *DBL: Double Leg & Double Base Rail*

CLOSE BOTH SIDES

HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
6'	$560	$685	$810	$935	$1,060	$1,185	$1,310
7'	$775	$925	$1,075	$1,225	$1,375	$1,525	$1,675
8'	$785	$945	$1,110	$1,275	$1,440	$1,605	$1,770
9'	$800	$975	$1,150	$1,325	$1,500	$1,675	$1,850
10'	$1,010	$1,215	$1,420	$1,625	$1,830	$2,035	$2,240
11'	$1,045	$1,265	$1,485	$1,705	$1,925	$2,145	$2,365
12'	$1,075	$1,310	$1,545	$1,780	$2,015	$2,250	$2,485
13'	$1,295	$1,550	$1,815	$2,080	$2,345	$2,610	$2,875
**14' DBL	$1,305	$1,570	$1,850	$2,130	$2,410	$2,690	$2,970
**15' DBL	$2,125	$2,605	$3,085	$3,565	$4,045	$4,525	$5,005
**16' DBL	$2,200	$2,705	$3,210	$3,715	$4,220	$4,725	$5,230
VERT. SIDES 6'-10'	$400	$500	$600	$700	$800	$900	$1,000
VERT. SIDES 11'-14'	$570	$710	$850	$990	$1,130	$1,270	$1,410
V. WAINSCOTING	$325	$400	$475	$550	$625	$700	$775

CLOSE ONE END Per End

HEIGHT	12' W	18' W	20' W	22' W	24' W
6'	$525	$765	$845	$925	$1,005
7'	$670	$970	$1,070	$1,170	$1,270
8'	$685	$985	$1,085	$1,185	$1,285
9'	$700	$1,000	$1,100	$1,200	$1,300
10'	$755	$1,115	$1,235	$1,355	$1,475
11'	$790	$1,150	$1,270	$1,390	$1,510
12'	$825	$1,185	$1,305	$1,425	$1,545
13'	$900	$1,350	$1,500	$1,650	$1,800
**14' DBL	$950	$1,400	$1,550	$1,700	$1,850
**15' DBL	$1,175	$1,700	$1,875	$2,050	$2,225
**16' DBL	$1,310	$1,880	$2,070	$2,260	$2,450
VERT. END Per End 6'-10'	$150	$225	$250	$275	$300
VERT. END Per End 11'-14'	$175	$250	$275	$300	$325
V. WAINSCOTING Per End	$200	$275	$325	$350	$375

© 2021 Copyright All Rights Reserved Eagle Carports , Inc. All prices are subject to change without notice 4.21

EXTRA PANELS

LENGTH	PRICE	*J-TRIM
20'	$140	Add $75
25'	$160	Add $90
30'	$180	Add $105
**35'	$200	Add $120
**40'	$225	Add $135
**45'	$250	Add $150
**50'	$275	Add $165

**J-Trim price covers both sides*
***Not a continuous panel*

ROLL UP GARAGE DOORS
High Wind Rated Doors

8'x8'	$800
9'x8'	$850
10'x8'	$875
10'x10'	$900
12'x12'	$2,200
*14'x14'	$2,700

**Special order door, lift required for installation*

45° TRIM KIT
Garage Door or Frame Out Add-on

PER OPENING	$100

Must close end or side

WALK-IN DOORS
Right Outswing / Window Included

36"x80"	$450

WINDOWS White with Grid

24"x36"	30"x36"
$200	$230

GABLE ON END
For Vertical Gable multiply price by 1.5, for Extended Gable multiply by 2.

12' W	18' W	20' W	22' W	24' W
$200 EA.	$290 EA.	$320 EA.	$350 EA.	$380 EA.

**Extended Gables have an additional 3' of coverage.*

TRIMMED HALF PANELS 12' - 30'
Kit made for both sides. Package price cannot be halved.

20' L	25' L	30' L	35' L	40' L	45' L	50' L
$215	$240	$265	$300	$345	$425	$455

CORNER KIT Must add Gable

Legs 6' - 8'	Legs 9' - 12'	Legs 13' - 16'
$225	$375	$525

2' wide max on each side. Must pair with gable.

FRAME OUTS
Use for framing of customer provided windows & doors

WINDOW	WALK-IN DOOR
$70	$85

STANDARD HEADERS / LARGE OPENINGS UNITS 12' - 30'

OPENINGS ONLY		OPENING WITH DOOR	
ON END 6'-16'	$125	ON END 6'-12'	$0
ON SIDE 6'-12'	$225	ON END 13'-14'	$125
ON SIDE 13'-16'	$300	ON SIDE 6'-12'	$125
		ON SIDE 13'-14'	$200

**Side must be 1' taller than desired door height. 14'x14' requires 2 foot taller*

HORIZONTAL WAINSCOTING Not available on 6' tall buildings. Price is **$9/ft x Perimeter on buildings with 10' and 7' eaves.**

WELDED TRUSS UPGRADE 18' - 24'	20' L	25' L	30' L	35' L	40' L	45' L	50' L
6' TRUSS FOR 18-24' WIDTHS	$200	$250	$300	$350	$400	$450	$500

EXTRA RAFTERS/ BOWS	12' - 24' W	DBL 12' - 24' W
	$275 EA. / 6' incl. **$20 per ft. up to 13' tall.**	$600 EA. / 14' incl. **$40 per ft. up to 16' tall.**

SIDE CONNECTION FEES Per Side

20' L	25' L	30' L	35' L	40' L	45' L	50' L
$120	$140	$160	$180	$200	$220	$240

LEAN TO CONNECTION FEES On End

12' - 22' Wide	24' Wide
$300	$400

INSULATION

DOUBLE BUBBLE TYPE (MOISTURE BARRIER)	R5	$1.50 SF
2" FIBERGLASS	R7	$2.25 SF

ROOF: Add 2' to width and multiply by length. Ex. 24' wide x 26' long 26 x 26 = 676 SF x $/per SF

SIDES: Multiply leg height by length by 2. Ex. 26' long x 10' tall 10 x 26 = 260 x 2 = 520 sf x $/per SF

ENDS: Add 1.5 to leg height, multiply by building width. Ex. 24' wide x 10' tall 11.5 x 24 = 276 x 2 = 552 sf x $/per SF

ADDITIONAL LABOR FEES	20' L	25' L	30' L	35' L	40' L	45' L	50' L
BUILD OVER FEE	$150	$175	$200	$250	$275	$325	$350
CUT LEGS ON SITE*	$100	$125	$150	$175	$200	$225	$250

**Cut leg fee has a maximum of 12" adjustment possible, either front to back or side to side. Please note, side to side on level lots will result in gap underneath garage doors.*

CONCRETE DIMENSIONS

All stated dimensions are in reference to the frame size, not the roof dimensions.
All cement pads require 2" wider on all sides. **Ex. 20' wide x 30' long unit will need a 20'4" wide x 30'4" long pad.**

Eagle Carports™

Triple Wide Carports 26'-30'

HIGH WIND APPLICATIONS: AL, GA, LA, MS, NC, SC, TX

PRICES EFFECTIVE APRIL 1ST 2021

VERTICAL ROOF

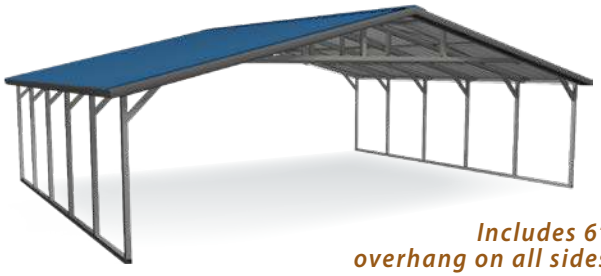

Includes 6" overhang on all sides

26x20	28x20	30x20
$3,945	$4,095	$4,245
26x25	**28x25**	**30x25**
$4,695	$4,895	$5,095
26x30	**28x30**	**30x30**
$5,895	$6,095	$6,395
26x35	**28x35**	**30x35**
$6,595	$6,845	$7,195
26x40	**28x40**	**30x40**
$7,395	$7,645	$7,995
26x45	**28x45**	**30x45**
$8,295	$8,545	$8,895
26x50	**28x50**	**30x50**
$8,995	$9,245	$9,595

BOXED EAVE ROOF

also known as **A-FRAME**

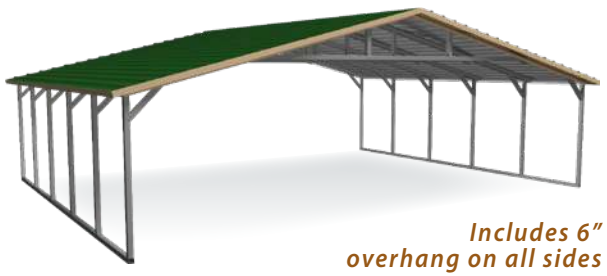

Includes 6" overhang on all sides

26x20	28x20	30x20
$3,145	$3,295	$3,445
26x25	**28x25**	**30x25**
$3,795	$3,995	$4,195
26x30	**28x30**	**30x30**
$4,395	$4,595	$4,795
26x35	**28x35**	**30x35**
$4,995	$5,395	$5,695

REGULAR ROOF

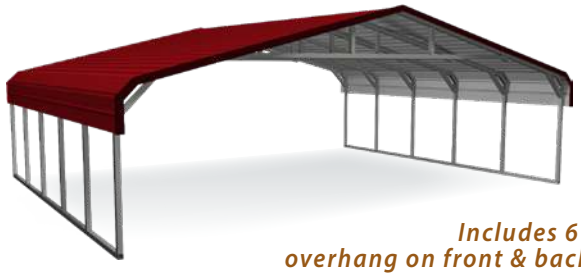

Includes 6" overhang on front & back

26x20	28x20	30x20
$3,045	$3,195	$3,345
26x25	**28x25**	**30x25**
$3,595	$3,795	$3,995
26x30	**28x30**	**30x30**
$4,195	$4,395	$4,595
26x35	**28x35**	**30x35**
$4,795	$5,095	$5,495

Pricing shown is for Risk Category I/Wind Exposure B. Please call for Risk Category II/Wind Exposure C options.

STANDARD FEATURES *Rated for 140MPH* *(3 second gusts, not sustained)*

Triple Wide carport features include the following: 14 gauge galvanized steel framing, 29 gauge metal roofing with 20 year Beckers paint system, framing spaced 5' on center. Includes both welded trusses and leg bracing for additional strength and stability. Concrete Anchors or Rebar Anchors, and Earth Auger Anchors are included in base price. Eagle Carports, Inc. is not responsible for stopping, or repairing leaks under base rails. ***Base leg height is 6' tall.***

Please note: Eagle Carports, Inc. does not provide site work.

Beckers™ 20 YEAR Paint Warranty
On roofing materials.
**Not available for regular style and boxed eve style longer than 31 feet.*

FREE EAGLE W/PURCHASE OF GABLE END OR CLOSED END

FREE INSTALLATION ON YOUR LEVEL LOT

90 DAY WORKMANSHIP WARRANTY

FINANCING & RTO AVAILABLE

© 2021 Copyright All Rights Reserved Eagle Carports , Inc. All prices are subject to change without notice 4.21

We accept all major credit cards.

OPTIONAL FEATURES FOR 26'-30' WIDE TRIPLE WIDE CARPORTS

EAVE HEIGHT

HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
7'	$80	$100	$120	$140	$160	$180	$200
8'	$160	$200	$240	$280	$320	$360	$400
9'	$240	$300	$360	$420	$480	$540	$600
10'	$320	$400	$480	$560	$640	$720	$800
11'	$400	$500	$600	$700	$800	$900	$1,000
*12'	$900	$1,100	$1,300	$1,500	$1,700	$1,900	$2,100
*13'	$1,000	$1,200	$1,400	$1,600	$1,800	$2,000	$2,200
**14' DBL	$1,300	$1,500	$1,800	$2,100	$2,400	$2,700	$3,000
**15' DBL	$1,425	$1,650	$1,975	$2,300	$2,625	$2,950	$3,275
**16' DBL	$1,550	$1,800	$2,150	$2,500	$2,850	$3,200	$3,550

** Leg with insert* *** Requres lift for installation* *DBL: Double Leg & Double Base Rail*

CLOSE BOTH SIDES

HEIGHT	20' L	25' L	30' L	35' L	40' L	45' L	50' L
6'	$560	$685	$810	$935	$1,060	$1,185	$1,310
7'	$775	$925	$1,075	$1,225	$1,375	$1,525	$1,675
8'	$785	$945	$1,110	$1,275	$1,440	$1,605	$1,770
9'	$800	$975	$1,150	$1,325	$1,500	$1,675	$1,850
10'	$1,010	$1,215	$1,420	$1,625	$1,830	$2,035	$2,240
11'	$1,045	$1,265	$1,485	$1,705	$1,925	$2,145	$2,365
*12'	$1,075	$1,310	$1,545	$1,780	$2,015	$2,250	$2,485
*13'	$1,295	$1,550	$1,815	$2,080	$2,345	$2,610	$2,875
**14' DBL	$1,305	$1,570	$1,850	$2,130	$2,410	$2,690	$2,970
**15' DBL	$2,125	$2,605	$3,085	$3,565	$4,045	$4,525	$5,005
**16' DBL	$2,200	$2,705	$3,210	$3,715	$4,220	$4,725	$5,230
VERT. SIDES 6'-10'	$400	$500	$600	$700	$800	$900	$1,000
VERT. SIDES 11'-14'	$570	$710	$850	$990	$1,130	$1,270	$1,410
V. WAINSCOTING	$325	$400	$475	$550	$625	$700	$775

CLOSE ONE END Per End

HEIGHT	26' W	28'W	30'W
6'	$1,200	$1,275	$1,350
7'	$1,325	$1,475	$1,625
8'	$1,375	$1,525	$1,675
9'	$1,425	$1,575	$1,725
10'	$1,600	$1,800	$2,000
11'	$1,625	$1,840	$2,050
*12'	$1,650	$1,875	$2,100
*13'	$1,850	$2,025	$2,200
**14' DBL	$1,900	$2,075	$2,250
**15' DBL	$2,125	$2,375	$2,575
**16' DBL	$2,360	$2,625	$2,835
VERT. END Per End 6'-10'	$350	$375	$400
VERT. END Per End 11'-14'	$375	$400	$425
V. WAINSCOTING Per End	$450	$525	$600

EXTRA PANELS

LENGTH	PRICE	*J-TRIM
20'	$140	Add $75
25'	$160	Add $90
30'	$180	Add $105
**35'	$200	Add $120
**40'	$225	Add $135
**45'	$250	Add $150
**50'	$275	Add $165

**J-Trim price covers both sides*
***Not a continuous panel*

ROLL UP GARAGE DOORS
High Wind Rated Doors

8'x8'	$800
9'x8'	$850
10'x8'	$875
10'x10'	$900
12'x12'	$2,200
*14'x14'	$2,700

**Special order door, lift required for installation*

45° TRIM KIT
Garage Door or Frame Out Add-on

PER OPENING	$100

Must close end or side

WALK-IN DOORS
Right Outswing / Window Included

36"x80"	$450

WINDOWS White with Grid

24"x36"	30"x36"
$200	$230

GABLE ON END
For Vertical Gable multiply price by 1.5, for Extended Gable multiply by 2.

26' W	28' W	30' W
$200	$290	$320

**Extended Gables have an additional 3' of coverage.*

TRIMMED HALF PANELS 12' - 30'
Kit made for both sides. Package price cannot be halved.

20' L	25' L	30' L	35' L	40' L	45' L	50' L
$215	$240	$265	$300	$345	$425	$455

CORNER KIT Must add Gable

Legs 6' - 8'	Legs 9' - 12'	Legs 13' - 16'
$225	$375	$525

2' wide max on each side. Must pair with gable.

FRAME OUTS
Use for framing of customer provided windows & doors

WINDOW	WALK-IN DOOR
$70	$85

STANDARD HEADERS / LARGE OPENINGS UNITS 12' - 30'

OPENINGS ONLY		OPENING WITH DOOR	
ON END 6'-16'	$125	ON END 6'-12'	$0
ON SIDE 6'-12'	$225	ON END 13'-14'	$125
ON SIDE 13'-16'	$300	ON SIDE 6'-12'	$125
		ON SIDE 13'-14'	$200

**Side must be 1' taller than desired door height. 14'x14' requires 2 foot taller*

HORIZONTAL WAINSCOTING Not available on 6' tall buildings. Price is **$9/ft x Perimeter on buildings with 10' and 7' eaves.**

WELDED TRUSS UPGRADE 18' - 24'	20' L	25' L	30' L	35' L	40' L	45' L	50' L
6' TRUSS FOR 18-24' WIDTHS	$200	$250	$300	$350	$400	$450	$500

EXTRA RAFTERS/ BOWS	26' - 30' W	DBL 26' - 30' W
	$375 EA. / 6' incl. **$20 per ft. up to 13' tall.**	$675 EA. / 14' incl. **$40 per ft. up to 16' tall.**

SIDE CONNECTION FEES Per Side

20' L	25' L	30' L	35' L	40' L	45' L	50' L
$120	$140	$160	$180	$200	$220	$240

LEAN TO CONNECTION FEES On End

26'-30'
$400

INSULATION

DOUBLE BUBBLE TYPE (MOISTURE BARRIER)	R5	$1.50 SF
2" FIBERGLASS	R7	$2.25 SF

ROOF: Add 2' to width and multiply by length. Ex. 24' wide x 26' long 26 x 26 = 676 SF x $/per SF

SIDES: Multiply leg height by length by 2. Ex. 26' long x 10' tall 10 x 26 = 260 x 2 = 520 sf x $/per SF

ENDS: Add 1.5 to leg height, multiply by building width. Ex. 24' wide x 10' tall 11.5 x 24 = 276 x 2 = 552 sf x $/per SF

ADDITIONAL LABOR FEES	20' L	25' L	30' L	35' L	40' L	45' L	50' L
BUILD OVER FEE	$150	$175	$200	$250	$275	$325	$350
CUT LEGS ON SITE*	$100	$125	$150	$175	$200	$225	$250

**Cut leg fee has a maximum of 12" adjustment possible, either front to back or side to side. Please note, side to side on level lots will result in gap underneath garage doors.*

CONCRETE DIMENSIONS

All stated dimensions are in reference to the frame size, not the roof dimensions.
All cement pads require 2" wider on all sides. **Ex. 20' wide x 30' long unit will need a 20'4" wide x 30'4" long pad.**

© 2021 Copyright All Rights Reserved Eagle Carports , Inc. All prices are subject to change without notice 4.21